



Let water flow, unhindered...

Factory Address: Om Industrial Area, B/h GEB Sub Station, Veraval - Padavala Road, Tal Kotda Sangani, Dist Rajkot, Gujarat - 360024, India Registered Office Address: Paschim Vihar, New Delhi -110063, India Mobile: +91-9810358158 Email: rvg@rvglobal.co.in Website: www.aqua-fide.com

## www.aqua-fide.com

## ABOUT US

### Manufacturing Excellence

Aqua-fide is one of the Leading Manufacturer of Home improvement solutions. Built on a platform of Highest Quality Standards, Aesthetics and world class products, Aqua-fide drives relentless pursuit of quality and spirit of craftsmanship. With 2 state of the art manufacturing units in India, we have capacity to manufacture 50K+ Profiles, Drainers & Accessories solution every day. As a manufacturer, our focus is to find creative products to solve customer problems. Our offered range consists of best grade of Profiles, Floor Drainers, Shower Drainers, Bathroom Accessories & many more. Our products are developed by experts who has spent more than 30 years in the industry and are made by using the latest manufacturing technologies.

### **Quality Focus**

Through the quality of Aqua-fide product range, we have been able to create a great position in Global markets. Our Stainless-Steel grade 304 raw material is quality checked and obtained from industry leading vendors who are acknowledged for their authenticity. Products are examined by our quality analyser on the guidance set by the accreditation bodies which make us more reliable and trustworthy.





#### Wide Application

Our products are widely used in homes, offices, industries, corporate office, malls, hospitals, shopping complex, and others. We are consistent in delivering a high standards product and its unique design enhances its beauty.

#### **Global Presence**

Today after 30 Years, brand Aqua-fide adorns millions of customers across APAC, Africa & Middle East regions and aims to reach newer heights while on this long and eventful journey. **To evolve is to last forever.** 

## 11 reasons to choose Aqua-fide



INTERNATIONAL GRADE STAINLESS STEEL (SS) FOR BEST AND LASTING PERFORMANCE.



HIGHER GRADE SS ARE MOST RESISTANT TO RUST AND CORROSION IN CONSTANT HUMID CONDITIONS.




DESIGNED TO INCREASE DRAIN EFFICIENCY. EACH DESIGN HAS VARIABLE HIGH FLOW RATE TO DRAIN SPEEDILY.



PRECISION ENGINEERED FOR EASY INSTALLATION AND ALL ESSENTIAL GUIDELINES PROVIDED.



SAFETY IS KEY FOR INSTALLATION AND DAY-TO-DAY USAGE. ALL SHARP EDGES ARE FOLDED INSIDE & TAPERED OUTSIDE.



GRADIENT SLOPE TOWARDS OUTLET INCREASES DRAINING CAPACITY AND OFFERS EASE IN MANUAL CLEANING.





DETACHABLE / OPENABLE PLATE FOR ROUTINE CLEANING AND MAINTENANCE.



\* Optional

ANTI-COCKROACH TRAP OPTIONS AVAILABLE TO CONTROL GENERIC PESTS.



INTERNATIONAL QUALITY STANDARD RAW MATERIAL, CRAFTSMANSHIP AND SIZES TO CATER TO GLOBAL MARKET.



CUSTOMIZED PRODUCT SIZES AND QUALITY CAN BE PRODUCED FOR CORPORATE, OE SOURCING AND INTERNATIONAL MARKET REQUIREMENTS.



GLOBALLY COMPLIANT 100% RECYCLABLE MATERIAL.



# SHOWER DRAINERS

Experience 5 star showers with elegant, efficient drainers.



Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) Outlet : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute Drainage Direction: Side / Center

WIDTH		
- i	LENGTH	-
HEIGHT		

Width Outlet Height

(mm)

45

45

43 43

**QUADRO** SHOWER CHANNEL DRAINER

#### Without Collar With Colla



ar*	300 / 450 / 6
	300 / 450 / 6
	300 / 450 / 6
* 75 mm Width	300 / 450 / 6

Length Options (mm)	(mm)	Dia. (mm)
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	50	40
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	75	50
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5

Shower Channel drainers are available in either side hole or center hole, also can be customized.




#### Specifications:

Thickness

Flow Rate

Outlet

: Base: 1 mm Plate: 1 mm (Both can be customized) : 40 - 64.5 mm : 40 - 65 Liters / Minute Drainage Direction: Side / Center



#### LINEAR SHOWER CHANNEL DRAINER

Without Collar With Collar\*



Length Options (mm)	Width (mm)	Outlet Dia. (mm)	Height (mm)
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	75	50	45
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5	43
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5	43

Shower Channel drainers are available in either side hole or center hole, also can be customized.

08

Length Options (mm)



Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) Outlet : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute Drainage Direction: Side / Center

WIDTH		
- i	LEN	IGTH
HEIGHT		]

**C-LINE** SHOWER CHANNEL DRAINER

Without Collar With Collar,



30 300 300

Length Options (mm)	Width (mm)	Outlet Dia. (mm)	Height (mm)
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	75	50	45
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5	43
0 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5	43

Shower Channel drainers are available in either side hole or center hole, also can be customized.

RISER SHOWER CHANNEL DRAINER

#### Specifications:

Outlet

Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute

Drainage Direction: Side / Center

#### **RISER** SHOWER CHANNEL DRAINER

Without Collar With Collar\*



Length Options (mm)	Width (mm)	Outlet Dia. (mm)	Height (mm)
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	75	50	45
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5	43
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5	43

Shower Channel drainers are available in either side hole or center hole, also can be customized.



Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) Outlet : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute Drainage Direction: Side / Center

WIDTH		
	LENGTH	•
HEIGHT		

Outlet

Dia. (mm)

50

64.5

64.5

Height

(mm)

45

43

43

S-LINE SHOWER CHANNEL DRAINER

Width

(mm)

75

100

125

Without Collar With Collar\*



300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500 300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500 300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500 \* 75 mm Width

Shower Channel drainers are available in either side hole or center hole, also can be customized.

ALIGN 

#### Specifications:

Outlet

Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute Drainage Direction: Side / Center

13

#### **ALIGN SHOWER CHANNEL DRAINER**

LENGTH

#### Without Collar With Collar\*



Length Options (mm)	Width (mm)	Outlet Dia. (mm)	Height (mm)
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	50	40	45
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	75	50	45
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5	43
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5	43

Shower Channel drainers are available in either side hole or center hole, also can be customized.

12

Length Options (mm)



Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) Outlet : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute Drainage Direction: Side / Center

WIDTH		
	LENGTH	
HEIGHT		

Dia. (mm)

40

50

64.5

64.5

Outlet Height

(mm)

45

45

43

43

TILE INSERT SHOWER CHANNEL DRAINER Width

(mm)

50

75

100

125


Without Collar With Collar\*



	Length Options (mm)			
	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500			
	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500			
	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500			
* 75 mm Width is not available	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500			

14

Shower Channel drainers are available in either side hole or center hole, also can be customized.

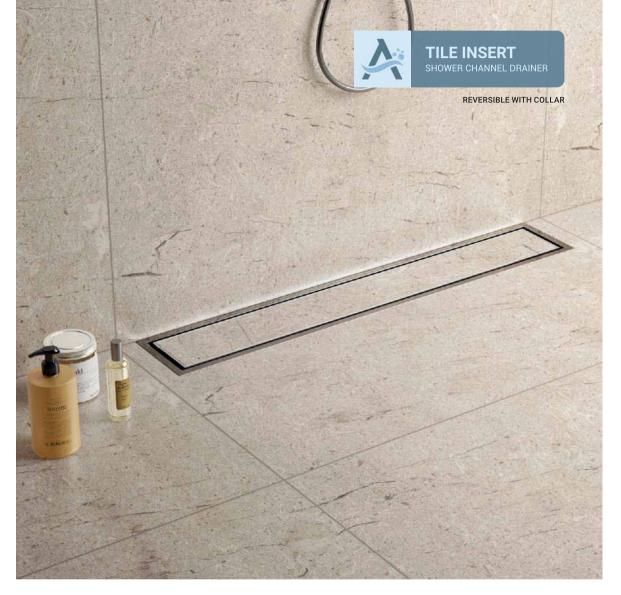

15

#### Specifications:

Drainage Direction: Side / Center

Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute

MDTH		
- F	LENGTH	•
неіднт		

TILE INSERT WITH COLLAR SHOWER CHANNEL DRAINER

With Collar

Outlet



Width Outlet Height Length Options (mm) (mm) Dia. (mm) (mm) 300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500 100 43 64.5 300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500 125 64.5 43

Shower Channel drainers are available in either side hole or center hole, also can be customized.



Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) Outlet : 40 - 64.5 mm Flow Rate : 40 - 65 Liters / Minute Drainage Direction: Side / Center

WIDTH		
- i	LENGTH	
HEIGHT	L	

MARBLE INSERT SHOWER CHANNEL DRAINER

#### Without Collar With Collar,



	Length Options (mm)	Width (mm)	Outlet Dia. (mm)	Height (mm)
	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	50	40	45
	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	75	50	45
	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5	43
1	300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5	43

Shower Channel drainers are available in either side hole or center hole, also can be customized.



#### Specifications:

Thickness : Base: 1 mm Plate: 1 mm (Both can be customized) : 40 - 64.5 mm

: 40 - 65 Liters / Minute

Flow Rate Drainage Direction: Side / Center

#### MARBLE INSERT WITH COLLAR SHOWER CHANNEL DRAINER

With Collar

Outlet



Length Options (mm)	Width (mm)	Outlet Dia. (mm)	Height (mm)
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	100	64.5	43
300 / 450 / 600 / 800 / 900 / 1000 / 1200 / 1500	125	64.5	43



# **FLOOR DRAINERS**


Laid back elegance. Quietly efficient. Keeps your floor dry, always.



Thickness : Base: 1 mm Plate: 1 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center




#### ONE PIECE EMBOSSED AVAILABLE



TILE INSERT FLOOR DRAINER - REVERSIBLE

75 x 75 / 100 x 100 / 125 x 125 90 46	Length (mm) x Width (mm)	Outlet Dia. (mm)	Height (mm)
150 150 (000 000 (000 000 000 00	75 x 75 / 100 x 100 / 125 x 125	90	46
150 x 150 / 200 x 200 / 300 x 300 90 46	150 x 150 / 200 x 200 / 300 x 300	90	46

OEM available.

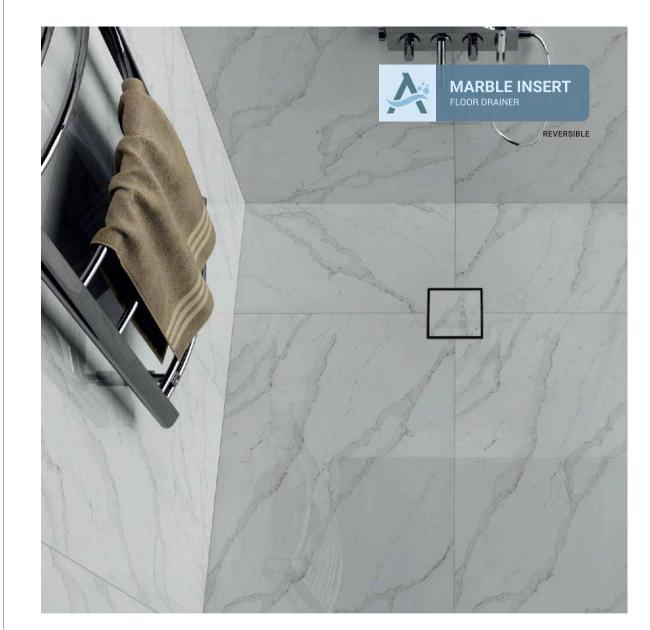

#### Specifications:

Outlet

Regular

Thickness : Base: 1 mm Plate: 1 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

Reversible



## MARBLE INSERT FLOOR DRAINER - REVERSIBLE


Length (mm) x Width (mm)	Outlet Dia. (mm)	Height (mm)
75 x 75 / 100 x 100 / 125 x 125	90	46
150 x 150 / 200 x 200 / 300 x 300	90	46



Without Screw

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### FENCE FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127 5" x 5" 22			
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			

OEM available.



#### Specifications:

Without Screw

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### TWIST FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127 5" x 5" 22			
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			





Without Screw

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### SPIRE FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	22	
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			

OEM available.



#### Specifications:

Without Screw

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### ARENA FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127 5" x 5" 22			
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			





Without Screw

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### TRIO FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127 5" x 5" 22			
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			

OEM available.



#### Specifications:

Without Screw

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### ACRO FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127 5" x 5" 22			
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			



Without Screw

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### **DROP** FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	22	
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			

OEM available.



#### Specifications:

Without Screw

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw





#### **ASTEC** FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	22	
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			


OEM available.



Without Screw

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### ALEXA FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	22	
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			

OEM available.




#### Specifications:

Without Screw

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center


With Screw



#### ACME FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	22	
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			



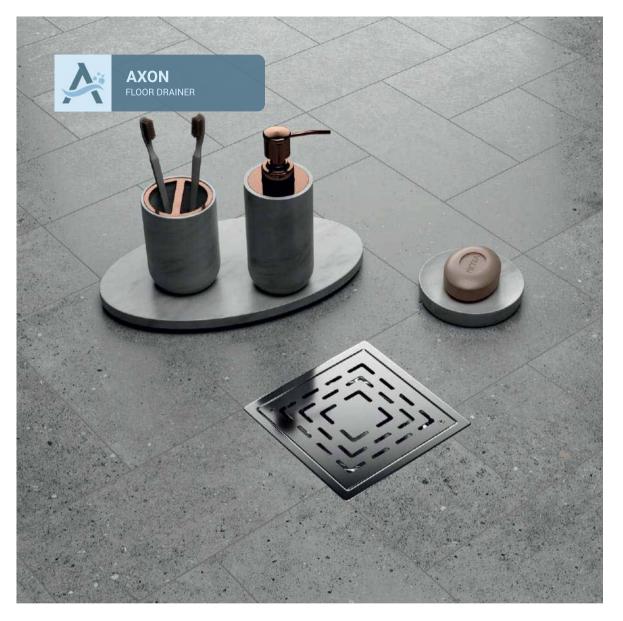

Without Screw

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center

With Screw



#### **AXON** FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	22	
150 x 150	6" x 6"	27	
Without Screw / With Screw Options			

OEM available.



#### Specifications:

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm : 50 - 70 Liters / Minute Flow Rate Drainage Direction: Center



#### ACROSS FLOOR DRAINER

Without Screw	With Screw	With Hole	With Hole & Screw	Size (mm)	Size (Inch) Approx.	Height (mm)
				127 x 127	5" x 5"	22
	1		1	150 x 150	6" x 6"	27
Long	Long	London	Long	Without Screv With Hole / W	v / With Screw ith Hole & Scre	w Options
					OE	M available.

#### 32



Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center



#### AURA FLOOR DRAINER

Approx.

5" x 5"

6" x 6"

(mm)

22

27

OEM available.






#### Specifications:

Outlet

Thickness : Base: 1 mm Plate: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center




#### WI-FI FLOOR DRAINER

(mm)

22

27

OEM available.





Without Screw

Thickness : Base: 1.5 mm (Can be customized) Outlet : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center



#### POP-UP FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)
127 x 127	5" x 5"	20
150 x 150	6" x 6"	20

OEM available.

#### Specifications:

Outlet

With Cover

Thickness : Base: 1.5 mm Cover: 1.5 mm (Can be customized) : 90 mm Flow Rate : 50 - 70 Liters / Minute Drainage Direction: Center




AARON

#### AARON FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)	
127 x 127	5" x 5"	20	
150 x 150	6" x 6"	20	

\*Available in 80x 80 & 100x100 mm size for the international market

OEM available.

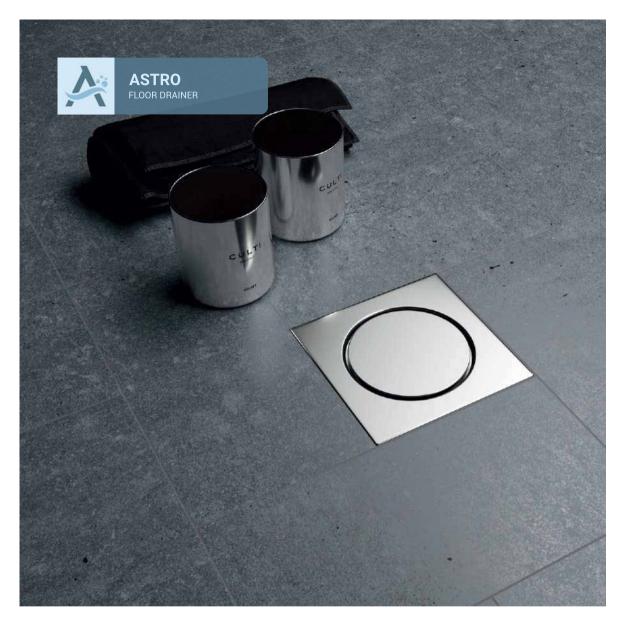

Thickness: Base: 1.5 mmCover: 1.5 mm(Can be customized)Outlet: 90 mmFlow Rate: 50 - 70 Liters / MinuteDrainage Direction : Center



#### ASTRO FLOOR DRAINER

Size (mm)	Size (Inch) Approx.	Height (mm)
127 x 127	5" x 5"	20
150 x 150	6" x 6"	20

OEM available.



#### Specifications:

Without Screw

Thickness: Plate: 0.8 mm (Can be customized)Outlet: 90 mmFlow Rate: 50 - 70 Liters / MinuteDrainage Direction: Center

DIAMETER

ARUM FLOOR DRAINER ROUND IN ROUND					
Diameter Diameter Height (mm) (Inch) Approx. (mm)					
127	5"	15			

OEM available.

Without Screw







40

#### Specifications:

Thickness: Plate: 0.8 mm (Can be customized)Outlet: N/AFlow Rate: 50 - 70 Liters / MinuteDrainage Direction : Center



Without Hole	With Hole

ARUM FLOOR DRAINER SQUARE IN SQUARE				
Size (mm)	Size (Inch) Approx. (mm)			
127 x 127	5" x 5" 08			
150 x 150 6" x 6" 08				
Without Hole / With Hole Options				





Thickness: Plate: 1 mm (Can be customized)Outlet: 85 mmFlow Rate: 50 - 70 Liters / MinuteDrainage Direction: Center



Without Hole With Hole

LOCK FLOOR DRAINER<br/>WITHOUT ANTI-COCKROACHSize (mm)Size (Inch)<br/>Approx.Height<br/>(mm)127 x 1275" x 5"13150 x 1506" x 6"13With Anti-Cockroach / Without Anti-Cockroach<br/>Without Anti-Cockroach with Hole OptionsStatemark

OEM available.



**SQUARE** With Anti-Cockroach







With Hole & Anti-Cockroach



Without Anti-Cockroach



ROUND With Anti-Cockroach



With Hole & Anti-Cockroach

Without Anti-Cockroach



Without Anti-Cockroach



LOCK AXIS FLOOR DRAINER WITH ANTI-COCKROACH Size (mm) Size (Inch) Height (mm) Approx. SQUARE 127 x 127 5" x 5" 67 127 x 127 5" x 5" 67 ROUND 67 127 5" 150 6" 67 With Anti-Cockroach / Without Anti-Cockroach Without Anti-Cockroach with Hole Options



#### SQUARE

With Anti-Cockroach

Without Anti-Cockroach





With Hole & Anti-Cockroach





Without Anti-Cockroach

ROUND With Anti-Cockroach



With Hole & Anti-Cockroach





LOCK ASPE	EN FLOOR D WITH ANTI-C	
Size (mm)	Size (Inch) Approx.	Height (mm)
SQUARE		
127 x 127	5" x 5"	67
127 x 127	5" x 5"	67
ROUND		
127	5"	67

150 6" 67 With Anti-Cockroach / Without Anti-Cockroach Without Anti-Cockroach with Hole Options

OEM available.



SQUARE With Anti-Cockroach





Without Anti-Cockroach

With Hole & Anti-Cockroach Without Anti-Cockroach





Without Anti-Cockroach

ROUND With Anti-Cockroach



With Hole & Anti-Cockroach

Without Anti-Cockroach



LOCK ARUM FLOOR DRAINER WITH ANTI-COCKROACH Size (Inch) Height Size (mm) (mm) Approx. SQUARE 127 x 127 5" x 5" 67 127 x 127 5" x 5" 67 ROUND 67 127 5" 150 6" 67

With Anti-Cockroach / Without Anti-Cockroach Without Anti-Cockroach with Hole Options

OEM available.







002 ACCESSORIES





003 ACCESSORIES





004 ACCESSORIES



75 mm



001 ACCESSORIES

Suitable for width 100 mm & 125 mm Shower Drainers Material: ABS

Suitable for width 100 mm & 125 mm Shower Drainers Material: SS 304

Suitable for all Floor Drainers Material: SS 304 Suitable for all Shower Drainers Material: ABS

005 ACCESSORIES 006 ACCESSORIES Suitable for width Shower Drainers Material: SS 304

Suitable for all Lock Drainers Material: SS 304



Available PVD options: Stellar Black, Gold, Rose Gold. Can be available in any design. Also can be customized in single or dual colours.